

HSK End Mill Holders

- End mill inner bore T.I.R. $\leq 0.0002"$
- Through-spindle coolant capability
- AT3 or better taper



T.I.R.: $< 0.0002"$ run out in ID bore



Speed: up to 20,000 RPM



Set-up: quick and easy



Coolant-Thru: jet slots (optional)



Milling



Drilling



Tapping



Reaming


Please note that the maximum RPM listed in our catalog may vary depending on the toolholder shank, weight, balanceability and the G rating.

HSK40A

Part Number	d	L	L1	D	Set Screw Part Number
HSK40A-0187-75	3/16"	2.950"	0.870"	0.750"	S8-32X1/4
HSK40A-0500-75	1/2"	2.950"	1.780"	1.380"	S7/16-20X3/8
HSK40A-0750-75	3/4"	2.950"	1.970"	1.890"	S5/8-18X1/2

HSK63A

Part Number	d	L	L1	D	Set Screw Part Number
HSK63A-0187-5.00	3/16"	5.000"	0.866"	0.748"	S8-32X1/4
HSK63A-0250-3.00	1/4"	3.000"	1.102"	0.787"	S1/4-28X1/4
HSK63A-0250-5.00	1/4"	5.000"	1.102"	0.787"	S1/4-28X1/4
HSK63A-0375-3.50	3/8"	3.500"	1.574"	1.000"	S3/8-24X5/16
HSK63A-0375-5.00	3/8"	5.000"	1.574"	1.000"	S3/8-24X5/16
HSK63A-0437-4.00	7/16"	4.000"	1.771"	1.378"	S7/16-20X3/8
HSK63A-0437-5.00	7/16"	5.000"	1.771"	1.378"	S7/16-20X3/8
HSK63A-0500-4.00	1/2"	4.000"	1.771"	1.378"	S7/16-20X3/8
HSK63A-0500-5.00	1/2"	5.000"	1.771"	1.378"	S7/16-20X3/8
HSK63A-0625-4.00	5/8"	4.000"	1.889"	1.654"	S9/16-18X1/2
HSK63A-0750-4.50	3/4"	4.500"	1.968"	1.889"	S5/8-18X1/2
HSK63A-0750-6.00	3/4"	6.000"	1.968"	1.889"	S5/8-18X1/2
HSK63A-1000-4.50	1"	4.500"	2.755"	2.363"	S3/4-16X11/16 (2)
HSK63A-1000-6.00	1"	6.000"	2.755"	2.363"	S3/4-16X11/16 (2)
HSK63A-1250-4.50	1-1/4"	4.500"	2.952"	2.880"	S3/4-16X11/16 (2)
HSK63A-1250-6.00	1-1/4"	6.000"	2.952"	2.880"	S3/4-16X11/16 (2)

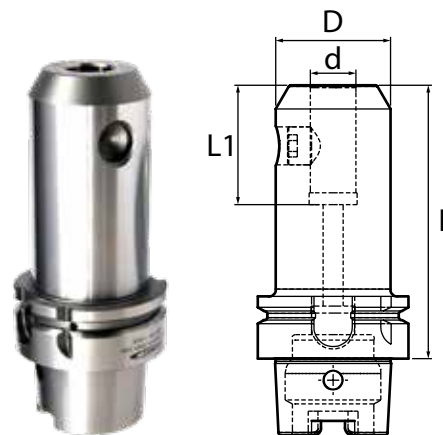

Note:

- Set Screws are included.
- Coolant tube and coolant tube wrench are sold separately.

